

## Plain Round Bollard 1000mm Above Ground 60mm - 219mm Diameter Galvanised & Yellow - Bolt Down






AUTOPA's range of Plain Round Bollards offers a simple and cost effective means of establishing control over parking and access. Yellow bollards are suitable for use where high visability is paramount and can be used around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The complete range of Plain Round Bollards is available in diameters from 60mm to 219mm and is available with extended legs for casting into concrete or with a flange plate for bolting down.

Additional colour coated options and removable versions are also available.

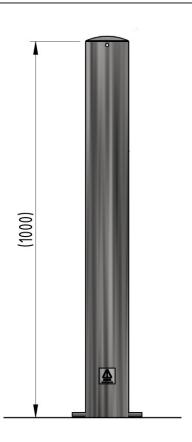

Part Number	<u>Diameter</u>	Weight (kg)
138 121 129Y	60mm Galvanised & Yellow	6kg
138 121 207Y	76mm Galvanised & Yellow	7kg
138 121 279Y	90mm Galvanised & Yellow	9kg
138 121 304Y	101mm Galvanised & Yellow	10kg
138 121 407Y	114mm Galvanised & Yellow	12kg
138 121 510Y	127mm Galvanised & Yellow	13kg
138 121 608Y	139mm Galvanised & Yellow	23kg
138 121 673Y	152mm Galvanised & Yellow	15kg
138 121 700Y	168mm Galvanised & Yellow	25kg
138 121 811Y	193mm Galvanised & Yellow	30kg
138 121 914Y	219mm Galvanised & Yellow	34kg

## **Product details**

- 3mm wall thickness 60mm-127mm and 152mm
- 5mm wall thickness 139mm-168mm and 219mm
- 3 hole round plate 133mm x 5mm 60mm & 76mm diameters
- 3 hole round plate 133mm x 5mm 90mm 114mm diameters
- 4 hole square plate 250mm x 10mm 127mm to 193mm diameters
- 4 hole square plate 400mm x 10mm 219 diameter

## Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).





