


TYPE VLC – VERTICAL LIFTING CLAMP

The standard lifting clamp is used for vertical lifting and turning of steel or metal plates and beams.

The lifting clamp is equipped with a safety locking device, but easily opens with the grip ring.

The VLC has a very robust design with re-enforced side plates.

To ensure your safety, please be aware of the capacity reduction when pulling at an angle.

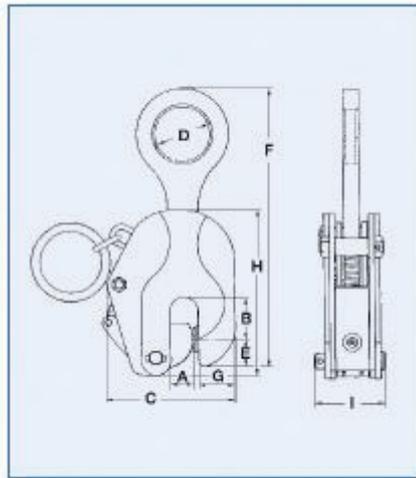



SPECIFICATIONS

REF	Lifting capacity t	Grip range in mm	Dimensions in mm									Weight kg
			A	B	C	D	E	F	G	H	I	
PL/VLC/1.0T	1	0 - 22	27	37	125	48	30	260	30	157	66	3.5
PL/VLC/2.0T	2	0 - 30	36	46	155	57	31	300	41	194	78	5.5
PL/VLC/3.0T	3	0 - 35	40	51	175	60	35	360	45	227	88	9
PL/VLC/5.0T	5	0 - 50	50	60	224	65	40	410	34	270	96	16.5

TYPE SLC – FOR LIFTING AND TURNING OF LOADS

The SLC is a universal clamp for lifting, turning and transporting of flat metal material in all directions.

The pivoting clamp combined with an extra suspension link, provides a greater degree of freedom and range of motion. A helpful lifting device when two or more clamps are needed at the same time. To ensure your safety please be aware of the capacity reduction when pulling under angle.

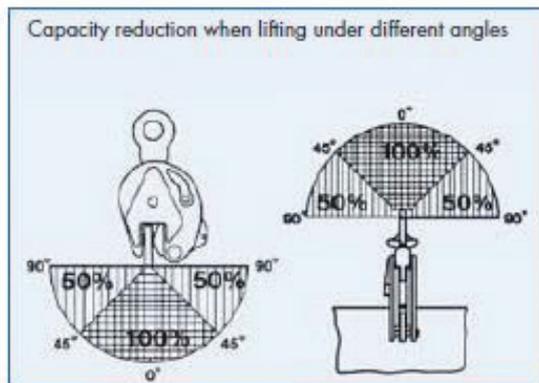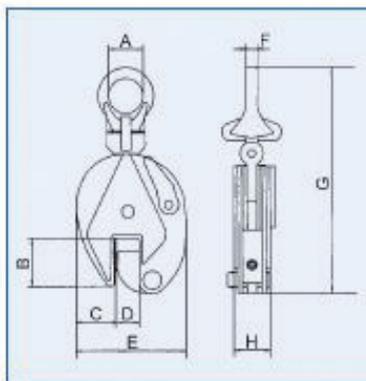

SPECIFICATIONS

REF	Lifting capacity t	Grip range (D) in mm	Dimensions in mm							Weight kg
			A	B	C	E	F	G	H	
PL/SLC/0.5T	0.5	0 - 15	30	43	34.5	103	10	212	36	2
PL/SLC/1.0T	1	0 - 20	48	63	51	138	12	294	50	5
PL/SLC/2.0T	2	0 - 25	68	76	59	164	16	370	52	7
PL/SLC/3.0T	3	0 - 30	74	85	56	193	20	418	78	15
PL/SLC/5.0T	5	0 - 52	80	90	65	240	22	450	88	23