




Plain Round Bollard 1000mm Above Ground 60mm - 219mm Diameter Galvanised - Concrete In

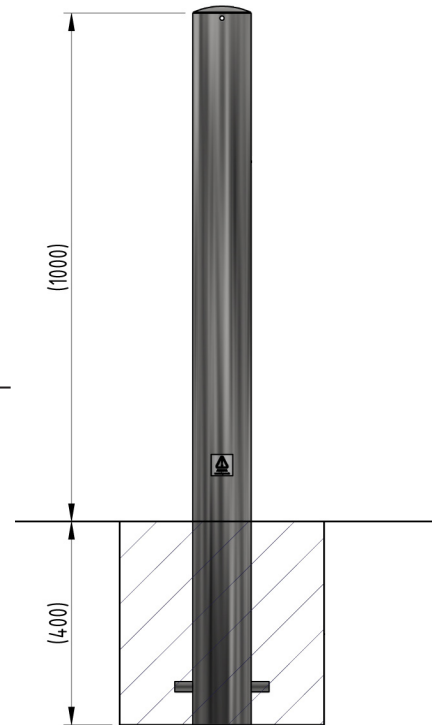

AUTOPA's range of Plain Round Bollards offers a simple and cost effective means of establishing control over parking and access. Plain Round bollards are ideal for use around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The complete range of Plain Round Bollards is available in diameters from 60mm to 219mm and is available with extended legs for casting into concrete or with a flange plate for bolting down.

Colour coated options and removable versions are also available.

<u>Part Number</u>	<u>Diameter</u>	<u>Weight (kg)</u>
138 121 123	60mm Galvanised	6kg
138 121 203	76mm Galvanised	7kg
138 121 284	90mm Galvanised	9kg
138 121 303	101mm Galvanised	10kg
138 121 403	114mm Galvanised	12kg
138 121 503	127mm Galvanised	13kg
138 121 603	139mm Galvanised	23kg
138 121 675	152mm Galvanised	15kg
138 121 703	168mm Galvanised	28kg
138 121 803	193mm Galvanised	33kg
138 121 903	219mm Galvanised	37kg

Product details

- 3mm wall thickness - 60mm-127mm and 152mm
- 5mm wall thickness - 139mm, 168mm - 219mm
- Concrete in 400mm (below ground)

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



HEYN 
ENVIRONMENTAL
1 Corry Place, Belfast, BT3 9AH
HEYN.co.uk | +44 2890 350020

