




Plain Round Bollard 1000mm Above Ground 60mm - 219mm Diameter Galvanised & Yellow - Concrete In

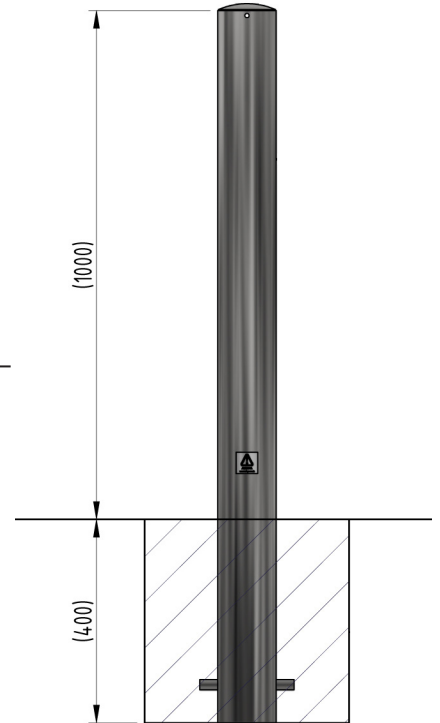

AUTOPA's range of Plain Round Bollards offers a simple and cost effective means of establishing control over parking and access. Yellow bollards are suitable for use where high visibility is paramount and can be used around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The complete range of Plain Round Bollards is available in diameters from 60mm to 219mm and is available with extended legs for casting into concrete or with a flange plate for bolting down.

Additional colour coated options and removable versions are also available.

Part Number	Diameter	Weight (kg)
138 121 124Y	60mm Galvanised & Yellow	6kg
138 121 201Y	76mm Galvanised & Yellow	7kg
138 121 286Y	90mm Galvanised & Yellow	9kg
138 121 306Y	101mm Galvanised & Yellow	10kg
138 121 405Y	114mm Galvanised & Yellow	12kg
138 121 506	127mm Galvanised & Yellow	13kg
138 121 605Y	139mm Galvanised & Yellow	23kg
138 121 678Y	152mm Galvanised & Yellow	15kg
138 121 704Y	168mm Galvanised & Yellow	28kg
138 121 805Y	193mm Galvanised & Yellow	33kg
138 121 904Y	219mm Galvanised & Yellow	37kg

Product details

- 3mm wall thickness - 60mm-127mm and 152mm
- 5mm wall thickness - 139mm, 168mm - 219mm
- Concrete in 400mm (below ground)

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



HEYN ENVIRONMENTAL
1 Corry Place, Belfast, BT3 9AH
HEYN.co.uk | +44 2890 350020

